



# Ornato Hybrid Flooring: TECHNICAL SPECIFICATIONS



Cotton Oak



Walnut Brown

• <b>Type</b>	Hybrid Floating Floor
• <b>EIR</b>	Yes
• <b>Pattern</b>	Single Strip
• <b>Dimension</b>	1511 x 229 x 8mm
• <b>Also Available</b>	1830 x 229 x 6.5mm
• <b>Warranty</b>	25 Years Domestic
• <b>Surface Finish</b>	0.55mm wear layer
• <b>Edging</b>	Micro Bevelled Edge
• <b>Profile</b>	Valinge 5G lock
• <b>Installation Method</b>	Floating
• <b>Pack Size</b>	1.73 m2   2.095m2
• <b>Pack weight</b>	23 kg
• <b>Boards per pack</b>	5
• <b>VOC Rating</b>	A+
• <b>Acoustics Rating</b>	5 Star AAAC
• <b>Construction</b>	Wear layer; Rigid core; IXPE Underlay
• <b>Slip Resistance Classification</b>	P2 AS4586-2013
• <b>Australian Fire Reaction Floor</b>	AS/ISO 9239-1:2003 CRF 7.0KW/m2



Seashell White



Warranty Domestic:  
25 Year Wear and Life time Structure



WATER PROOF



25 YEAR  
DOMESTIC  
WARRANTY



5 YEAR  
COMMERCIAL  
WARRANTY


# Ornato Hybrid Flooring:

## TECHNICAL SPECIFICATIONS



**Applications:** For use in interior areas of private homes and commercial establishments  
**Warranty:** 25 years for private use / 5 years for commercial use in accordance with the Ornato Hybrid warranty terms

### Ornato Hybrid Board Construction:

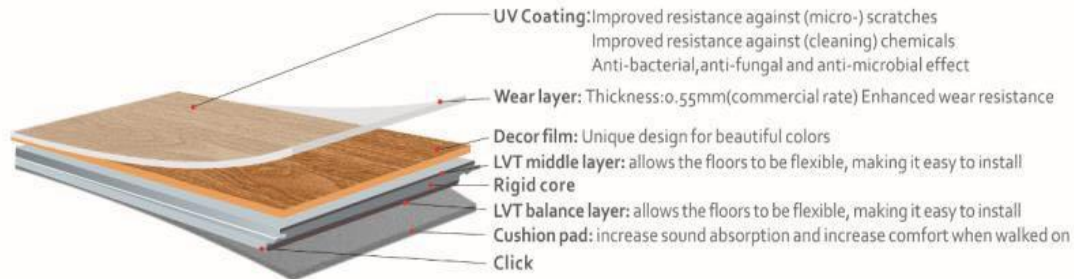

### CLEANING INSTRUCTIONS:

#### Daily Regular Maintenance

Ornato Hybrid Floors come with a highly resistant polyurethane wear layer. Following these cleaning and maintenance guidelines will ensure optimal results and increase the longevity of your floor.

Clean the hybrid floor surface regularly by sweeping or vacuuming to remove all surface dirt and other loose particles. This will prevent the surface from being scratched.

Thoroughly clean and mop with water using PH neutral cleaner to remove any footprints, dirt and other stains or marks.

Spot clean any marks or spillages immediately with recommended cleaning products and remove any excess water

Keep the floor surface from pollutants and remove immediately.

All hard floors can be slippery when wet. Take extra care when cleaning and ensure the floor area is allowed to dry completely before use. During periods of wet weather, it may be necessary to put down extra matting to prevent water from being brought in from outside.

Avoid using aerosol sprays or silicone-based products, as these can make the floor slippery.

Ornato Hybrid floors are completely waterproof, but they do not prevent the transmittance of moisture. Care should be taken to keep moisture from collecting on either side of Ornato hybrid to prevent the growth of mould and mildew.

**IMPORTANT:** Do not use oil based, ammoniated, abrasive paste, wax, silicones or solvent based products as they will harm the long term performance of the Surface finish. Sliding or dragging furniture or other objects across the floor can scratch your floor. Use load bearing castors to prevent indentation from heavy furniture or appliances.

\*Ornato Hybrid floors must be installed by a competent approved installer who will have the necessary skills and take individual site circumstance into account. Ornato Hybrid Floors warranty will only apply to floors which have been installed according to the Ornato Hybrid installation instructions available in each box of Ornato Hybrid Flooring.

*Terms & Conditions: Eco Flooring Australia Pty Ltd reserves the right to change the specifications of this product at any time without prior notice to third parties.*

**Eco Flooring Australia Pty Limited**

Phone: 02 9631 7400 Fax: 02 8569 0535

e-mail: [enquiries@ecoflooring.com.au](mailto:enquiries@ecoflooring.com.au)

Copyright © 2020 Details cannot be reproduced without the permission of Eco Flooring Australia Pty Ltd



**ECO FLOORING SYSTEMS®**